

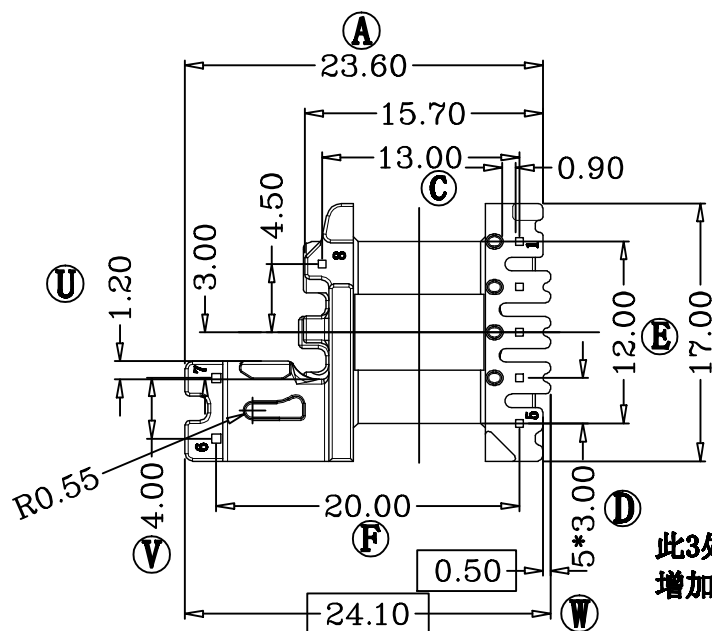
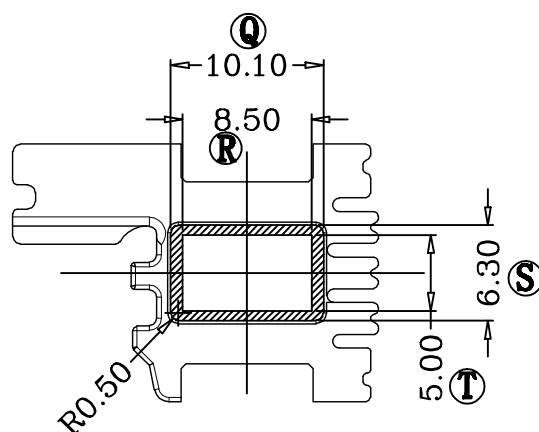
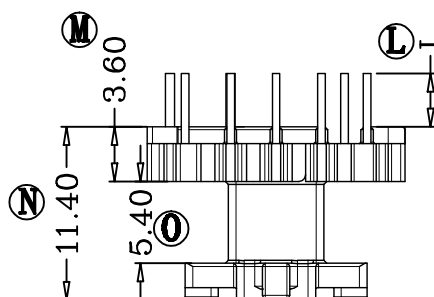


ZX-16BL

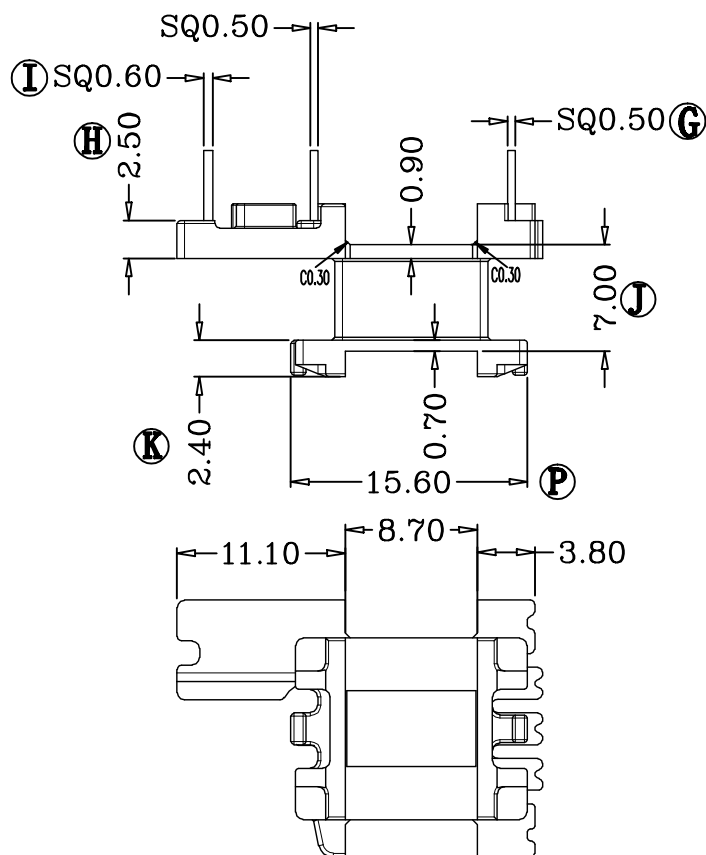

此3处PIN台往外加胶0.50mm,
增加⑩尺寸为24.10mm

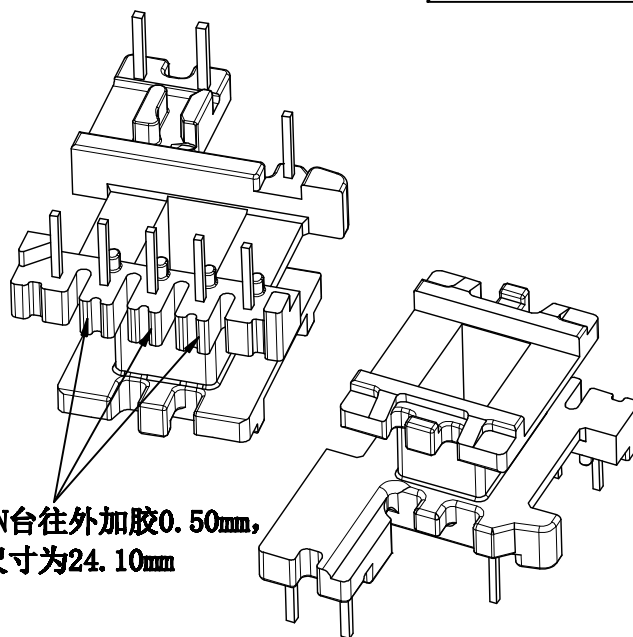

项次	REVISIONS REC.	DATE	项次	REVISIONS REC.	DATE
1	PIN台加R角0.3,降低0.3MM	2019.02.26	4	PIN针由 $\varnothing 0.6$ 改为SQ0.5, PIN针由 $\varnothing 0.7$ 改为SQ0.6	2019.10.11
2	⑤尺寸由11.50改为12.00	2019.02.26	5	PIN台再降低0.3MM, R角0.6, 凸点减胶0.3	2019.10.11
3	加C角0.3, 槽尺寸①由1.60改为1.20	2019.02.26	6	倒C角1.5, 转角位倒R角2.0	2019.10.11
DRAWN & DRAFTED BY	CHEN LING	TOLERANCES		TITLE: EE-16(5+2+1P)	
CHECKED & APPROVED BY		0<L<4	± 0.1	BOBBIN MATERIAL: PHENOLIC	
		4<L<16	± 0.2	UL REC. UL 94V-0	
		16<L<63	± 0.3	PIN MATERIAL: CP WIRE	
智信电子塑胶有限公司		SCALE:		PIN TENSION LOAD: 0.8KG MIN	
ZHI XIN ELECTRONICS PLASTIC CO., LTD.		UNIT: MM		DATE: 2024.08.27	DRAWING NO. ZX-16BL
TEL:0769-86389901-2 FAX:0769-86389903		ANGLE: $\pm 1^\circ$		REV. A06	