

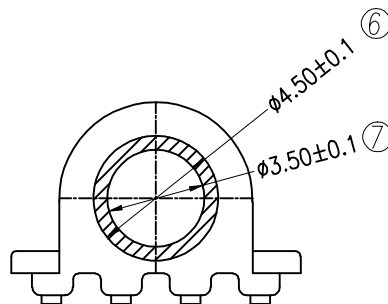
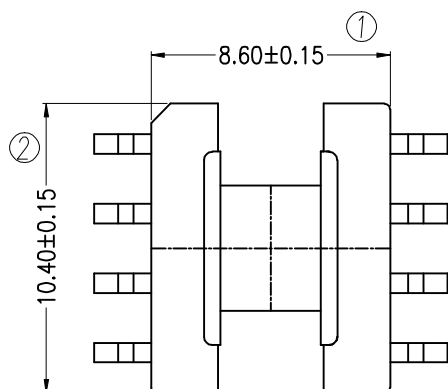
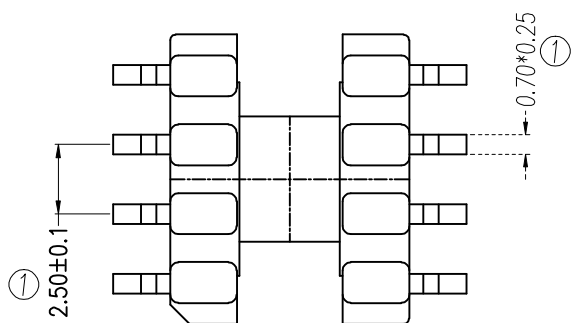
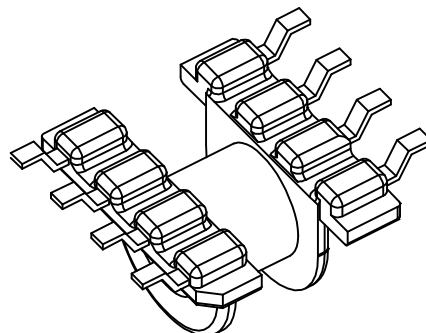


ZXS-7I

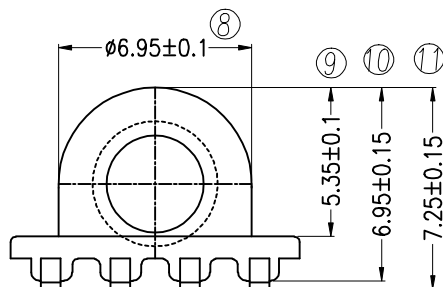

SECTION A-A

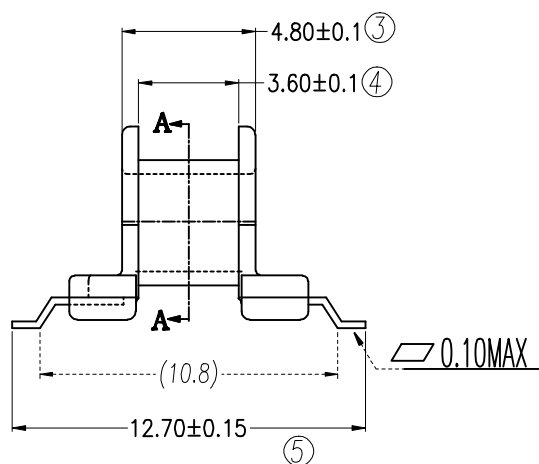


备注:

<1>. 材质: PM9630/C5191-H;

<2>. 电镀雾锡: Ni:1.3-3um, Sn:5.1-10um,
切断面需上锡;

<3>. 拉力测试: 确认样品引脚无松动后, 在引脚轴方向施加
拉力1.5KG Min;

测试结果: PIN脚无断裂、损伤脱离骨架、松弛等不良;

项次	REVISIONS REC.			DATE	项次	REVISIONS REC.			DATE				
1					4								
2					5								
3					6								
DRAWN & DRAFTED BY		LIU WEI QIANG		TOLERANCES		ANGLE: ±1°		TITLE: EP7(4+4P)					
CHECKED & APPROVED BY		LIN JUN		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3		pin pitch ±0.2		UNIT: MM					
智信电子塑胶有限公司 ZHI XIN ELECTRONICS PLASTIC CO., LTD. TEL:0769-86389901-2 FAX:0769-86389903						SCALE:		PIN MATERIAL: C5191-H		UL REC. UL 94V-0			
								DATE: 2023.11.03		DRAWING NO. ZXS-7I		PIN TENSION LOAD: 1.5KG MIN	
												REV. A01	