
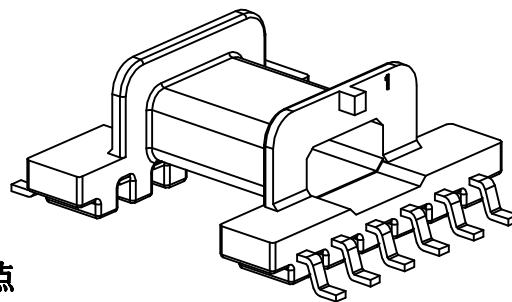
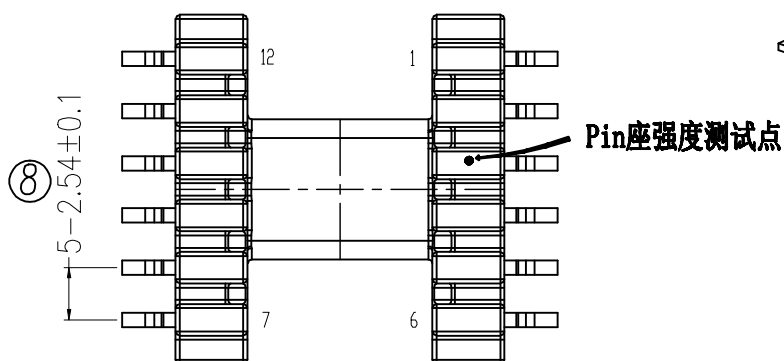
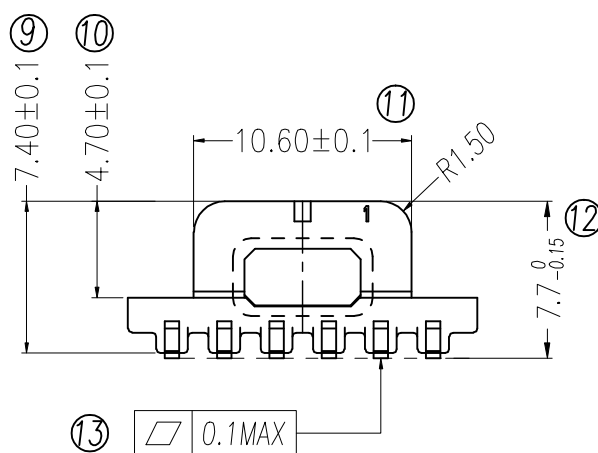
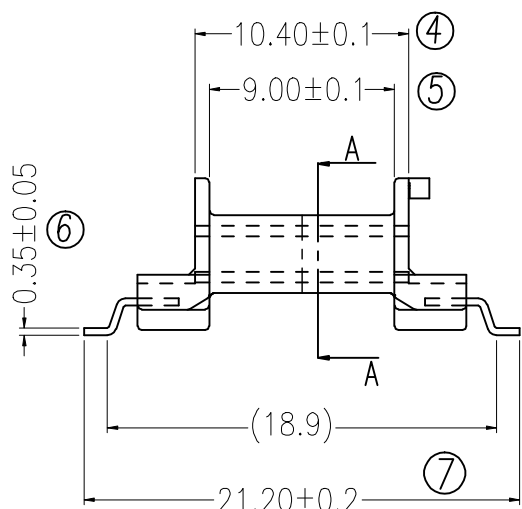
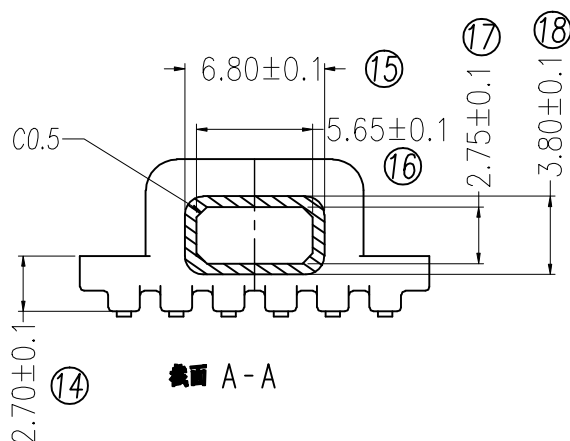
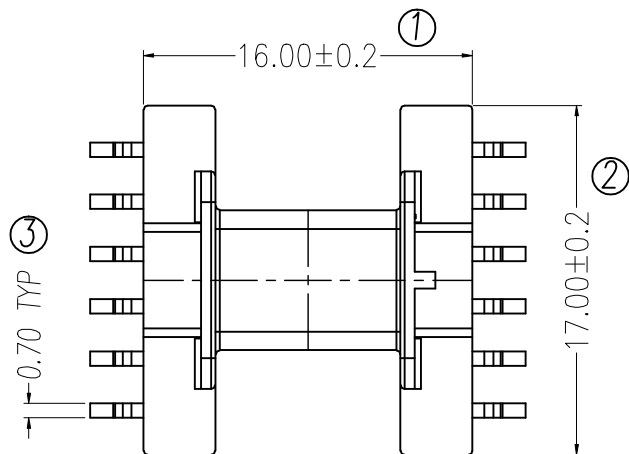


ZXS-15N



备注:

- 1: PIN平面度0.1MM MAX
2: 所有未标注的转角R0.3MM
3: 镀层 Ni: 1.2 μ m
Sn: 4 μ m-7 μ m 截断面上锡
4: 叶片与pin台增加强度测点
推力计强度大于或等于4kg

项次	REVISIONS			REC.	DATE	项次	REVISIONS			REC.	DATE		
1						4							
2						5							
3						6							
DRAWN & DRAFTED BY		LIU WEI QIANG		TOLERANCES		ANGLE: ±1°		TITLE: EFD15-7.7(6+6P)					
CHECKED & APPROVED BY		LIN JUN		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3		pin pitch ±0.2		UNIT: MM		BOBBIN MATERIAL: PM-9630		UL REC. UL 94V-0	
智信电子塑胶有限公司 ZHI XIN ELECTRONICS PLASTIC CO., LTD. TEL:0769-86389901-2 FAX:0769-86389903						SCALE:		PIN MATERIAL: C5191-H		PIN TENSION LOAD: 4.0KG MIN			
								DATE: 2024.03.23		DRAWING NO. ZXS-15N		REV. A01	



智信电子塑胶有限公司

ZHI XIN ELECTRONICS PLASTIC CO., LTD.
TEL:0769-86389901-2 FAX:0769-86389903