

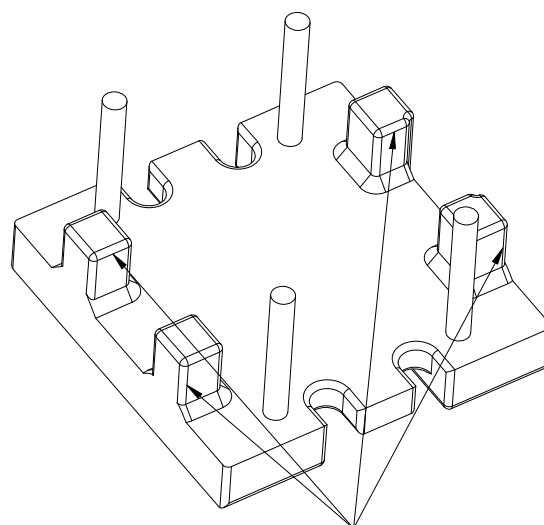
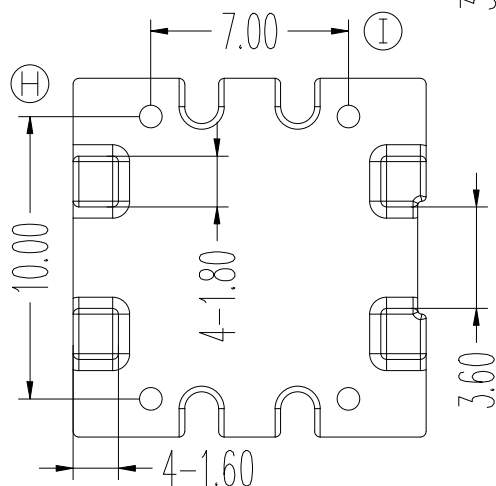
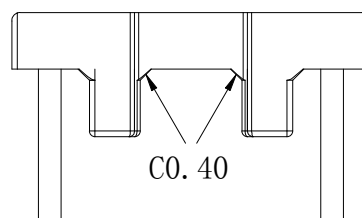
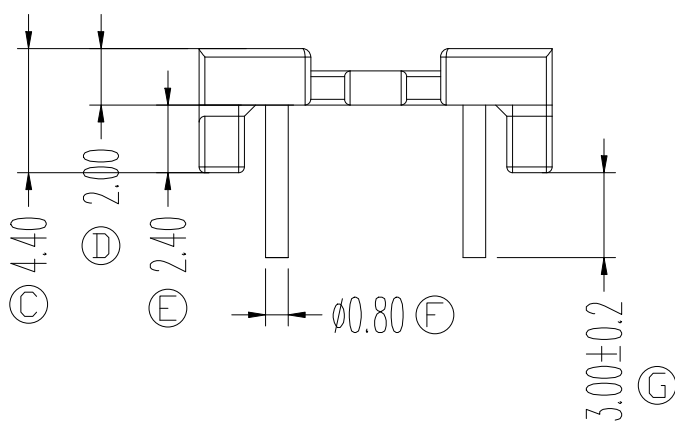


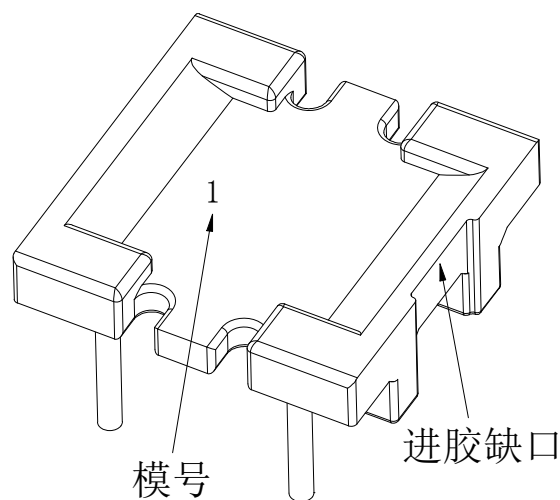

4个支点向内侧加粗，
改为1.60X1.80

项次	REVISIONS	REC.	DATE	项次	REVISIONS	REC.	DATE
1	0.30mm深度的圆弧填平		2025.01.06	4	四个角填平，⑩尺寸由1.60改为2.00		2025.02.11
2	填高0.40mm，⑧尺寸由12.70改为12.70MAX		2025.01.06	5	4个支点向内侧加粗，改为1.60X1.80		2026.08.28
3	⑩尺寸由1.80改为1.60，⑥尺寸由1.80改为2.40		2025.01.06	6			
DRAWN & DRAFTED BY		LIU WEI QIANG		TOLERANCES		ANGLE: ±1	
CHECKED & APPROVED BY		LIN JUN		0<L≤4 ±0.1		UNIT: MM	
				4<L≤16 ±0.2		TITLE: T18201-382B BASE	
				16<L≤63 ±0.3		BOBBIN MATERIAL: PHENOLIC	
				pin pitch ±0.2		UL REC. UL 94V-0	
						PIN MATERIAL: CP WIRE	
						PIN TENSION LOAD: 0.8KG MIN	
						DATE: 2024.12.09	
						DRAWING NO. ZX-B189	
						REV. A04	

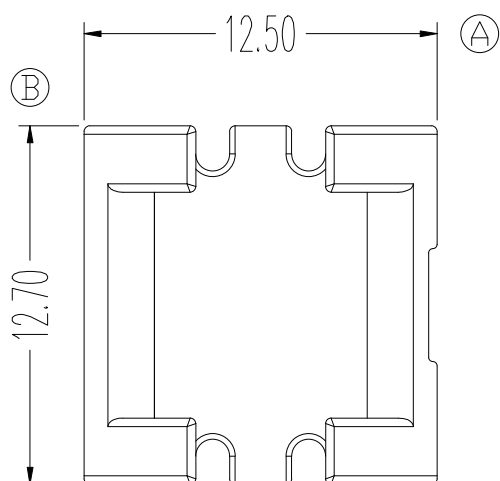

智信电子塑胶有限公司

ZHI XIN ELECTRONICS PLASTIC CO., LTD.
TEL: 0769-86389901-2 FAX: 0769-86389903

